Europäisches Patentamt

European Patent Office

Office européen des brevets



(11) EP 0 862 882 A1

(12)

EUROPEAN PATENT APPLICATION

- (43) Date of publication: 09.09.1998 Bulletin 1998/37
- (51) Int. Cl.6: A47J 31/40
- (21) Application number: 98101852.6
- (22) Date of filing: 04.02.1998
- (84) Designated Contracting States:

 AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC

 NL PT SE


 Designated Extension States:

 AL LT LV MK RO SI
- (30) Priority: 05.02.1997 IT MI970222
- (71) Applicant: C.M.A. S.p.A. 31058 Susegana (Treviso) (IT)

- (72) Inventor: Nello, Dal Tio 31058 Susegana (Treviso) (IT)
- (74) Representative:
 Dalla Rosa, Adriano
 Via S. Vito 13/B
 33170 Pordenone (IT)

(54) Express-coffee machine loadable with wafers

(57) Express-coffee-machine loadable with wafers for family or professional use including a casing (2), a unit (4) for pressing the wafer (36), into which the water is led through a boiler (16) which is arranged below said unit (4), permitting an opening from the above of said unit (4).



illustrated in Fig. 6, the head 6 is initially lowered onto the head 5 by making a first rotation of the arm 24 hinged with the unit 4, until the head 6 engages the head 5 as Fig. 5 shows.

In order that the fork 28 is in a proper engagement position with respect to the projection 31, when the two heads 5 and 6 are into contact, the lever 26 contains a resilient element 34 (Fig. 6) in particular a spring, so that when the closing device 8 is not operating, the lever 26 is moved away of an opening angle with respect to the arm 24 and thereby permitting the fork 28, which in turn is integral with the arm 24, to attain the proper engagement position.

The opening angle of the lever 26 with respect to the arm 24 is regulated by means of blocks 35. Thereafter, a further pressure on the lever 26 causes a rotation of the lever 26 with respect to the joint 25, by engaging the cavities 30 of the lever 26 with the projections 31 of the fixed head 5.


Said cavities 30 have flared edges in order to facilitate the insertion into said projections 31. According to what explained, there are clear the advantages of the coffee machine according to the invention, which is provided with a simplified closing unit, which makes the operations of loading and cleaning thereof easier.


Claims

- Express coffee machine loadable with wafers including a casing (2), a unit (4) for the pressing of the wafer (36) in which the water is led through a boiler (16), characterized in that said unit (4) includes a fixed lower head (5) and a movable upper head (6) which can be engaged and disengaged to each other by means of lever closing means (8), and that said boiler (16) is arranged below said unit (4).
- Coffee machine according to claim 1, characterized in that said lever closing means (8) includes an arm (24) carrying said movable upper head (6), hinged at its first end portion with the structure carrying said fixed lower head (5) and connected at the other end portion by means of a joint (25) with a control lever (26).
- 3. Coffee machine according to claim 2, characterized in that said control lever (26) is fixed integrally with a tork (28), at the ends of which some cavities (30) engaging projections (31) provided on the fixed head (5) are provided, said cavities (30) being provided with flared edges in order to facilitate the introduction of said projections (31) therein.
- Coffee machine according to claim 3, characterized in that said control lever (26) contains a resilient element (34), in particular a spring.

Coffee machine according to claim 3, characterized in that said control lever (26) co-operates with blocks (35) for regulating the opening angle of the same lever with respect to said arm (24).

3

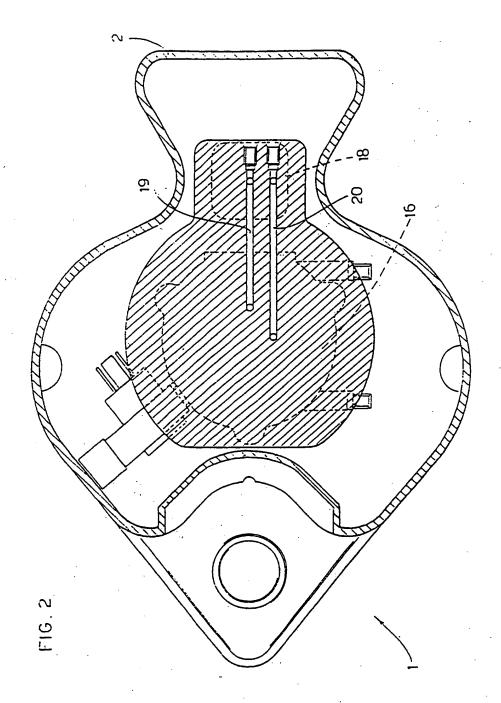

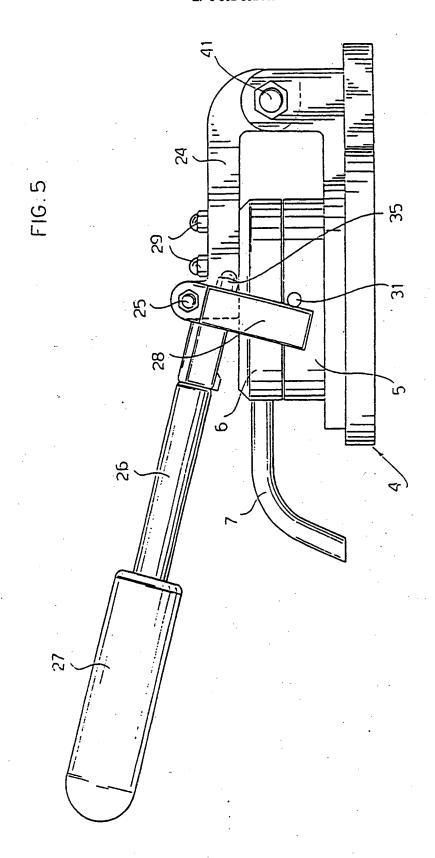

7



EUROPEAN SEARCH REPORT

Application Number EP 98 10 1852 .

ategory	Citation of document with indicati	on, where appropriate,	Relevant	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
	of relevant passages		to claim	
4	US 2 451 195 A (BROWN) 12 October 1948 + column 4, line 18 - column 8, line 19;		1-5	A47J31/40
	figures 1-10 *			
		• · · · · · · · · · · · · · · · · · · ·		
A	US 3 007 392 A (PECORARO ET AL) 7 November		1-3	
	1961		1	
	* column 1, line 41 - column 4, line 48;		1	1
	figures 1-3 *		1	1
	US 5 531 152 A (GARDOSI GIANCARLO) 2 July		1	
A	1996	diamonico/ 2 daily	1*	
	* column 5, line 58 - 0	İ		
	figures 4,5 *			
		-	1	1
A	US 3 403 617 A (LAMPE WILLY G) 1 October		1	
	1968			
	* column 2, line 9 - column 4, line 72;		1	
	figures 1,2 *			
A	DE 296 01 233 U (J J DARBOVEN GMBH & CO)			
M	13 June 1996			TECHNICAL FIELDS
			1	SEARCHED (Int.Cl.6)
A	EP 0 615 713 A (EUROMATIK SRL) 21			A47J
	September 1994			
				,
		•		
		•		İ
	•			
			ŀ	İ
			İ	
		•		1
			_	
	The present search report has been	drawn up for all claims		
	Place of search	Date of completion of the search	'	Examiner
THE HAGUE 7 May		7 May 1998	Boo	dart, P
	 	T : theory or princi		
	CATEGORY OF CITED DOCUMENTS	E : earlier patent d	locument, but put	lished on, or
X : par	ticularly relevant if taken alone ticularly relevant if combined with another	after the filing of D : document cited	rate 3 in the application	n
doc	current of the same category	L : document cited	tor other reason	
A : technological background O : non-written disclosure P : intermediate document		& : member of the	& : member of the same patent family, corresponding	
		document		